


Spectrum Analyzers

2399C 1 kHz to 3 GHz Spectrum Analyzer

AEROFLEX
A passion for performance.

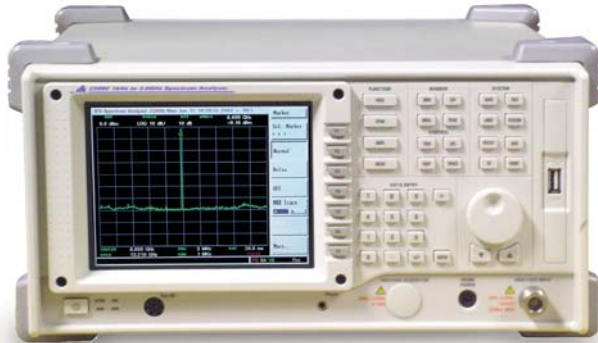

A spectrum analyzer with outstanding performance and a user friendly visual interface simplifying many complex measurements

- 1 kHz to 3 GHz fully synthesized frequency range
- Lightweight, portable and rugged construction at 9.4 kg (20.7 lbs.)
- Excellent TFT color display
- Comprehensive marker facility
- Wide input signal range +30 dBm to -110 dBm
- Optional tracking generator
- Semi-automated measurements
- USB 2.0 interface
- Extremely user friendly MMI reduces risk of operator error
- Auto-Tune facility
- GPIB as standard
- AM/FM demodulation
- Optional internal pre-amplifier

A "Value for Money" Product

The 2399C is the latest in the range of spectrum analyzers from Aeroflex providing exceptional performance at an exceptional price.

Frequency Accuracy

The local oscillator system in the 2399C is fully synthesized thus providing accurate frequency measurements with 1 Hz resolution.


Portability

With a weight of only 9.4 kg (20.7 lbs.) the 2399C is one of the lightest spectrum analyzers available. A truly portable unit!

Color Display

The 6.4 inch TFT color LCD in the 2399C provides a clear, bright, sharp display with a 640 x 480 pixel active display area viewable in high ambient light conditions.

Comprehensive Marker System

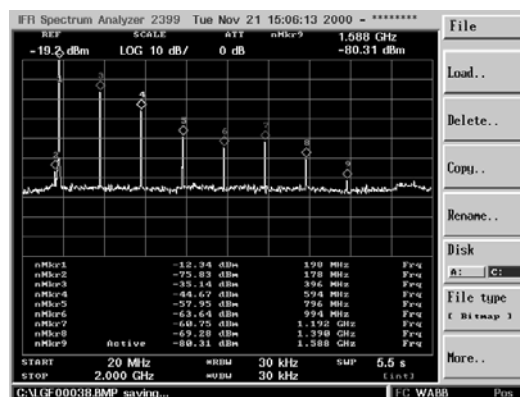

Marker Table

The marker system allows up to a maximum of 9 markers to be displayed on the screen at any one time. A marker table shows the frequency and level of each marker selected thus allowing multiple signals to be evaluated simultaneously. In addition to the Normal markers 2399C provides Delta, Peak Search, Peak Track, 1/Delta, Marker Track, Marker to Center and Marker to Reference capabilities.

Measurement Limits

The Limits facility allows an Upper and/or a Lower Limit to be set on the screen of the 2399C. Should the signal being displayed fall outside either limit a message will appear on the screen showing which limit has been exceeded and how many times this has happened.

Wide Signal Measurement Range

The 50 ohm input on the 2399C can accept signals between +30 dBm and -110 dBm while providing protection to ± 50 Vdc.

Semi-Automated Measurements

The MMI on the 2399C has been designed to simplify many of the measurements required for the evaluation of today's sophisticated communications systems. These include Adjacent Channel Power, X dB Down, Occupied Bandwidth, Channel Power and Harmonic Distortion.

Auto-Tune Function

Use of this function allows an unknown signal to be quickly captured and displayed on the screen. The 2399C will search its complete frequency range for the highest level signal, capture it and display it in the center of the screen with both the span and resolution bandwidths being automatically set to the optimal state for best viewing.

Spectral Purity

The phase noise on the 2399C is specified at -90 dBc at 10 kHz offset which allows its use for evaluating the spectral purity and noise performance of systems and sub-systems.

Signal Demodulation

Demodulation of both AM and FM signals allows full testing on a wide range of communications systems. The demodulated signal can be viewed on the screen and is also available on the internal loud-speaker and on headphones via a connector on the front panel. The FM peak deviation and AM modulation depth can be measured using the markers provided in the 2399C.


Information Storage

The 2399C is provided with the capability of internally storing up to 1,000 screen traces and 2,000 operational states. The spectrum analyzer is also fitted with a USB 2.0 interface for download to bulk storage.


Interfaces

IEEE 488-2, RS-232 and Printer (PCL5) interfaces are provided as standard on the 2399C allowing its integration into automated test systems and the print out of screen displays.


The 2399C has been designed with future flexibility and expansion in mind. The operating system and system memory have the capability to incorporate additional facilities.

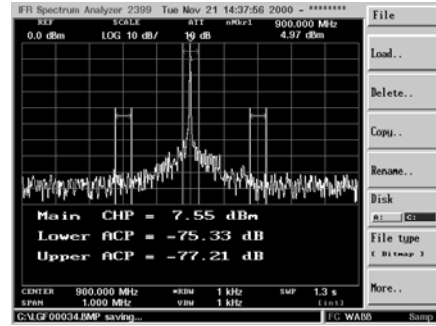


Adjacent Channel Power

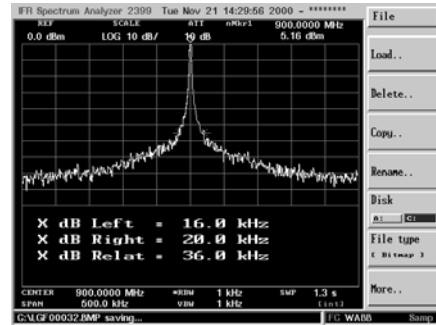


X dB Down

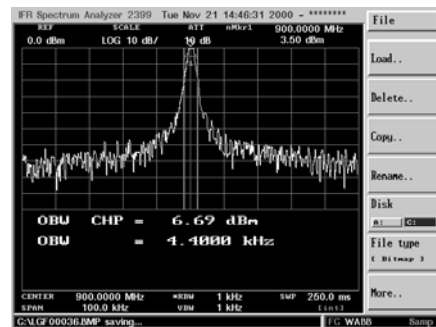

Occupied Bandwidth

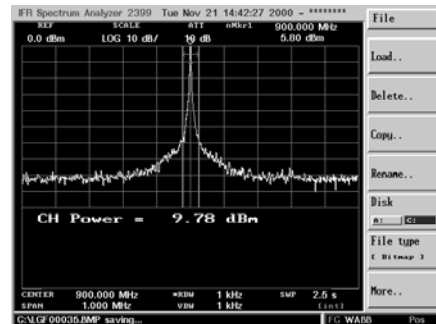

Channel Power

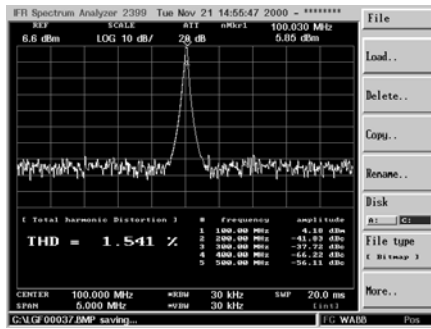

Harmonic Distortion

DISTANCE TO FAULT SOFTWARE OPTION

The 2399C spectrum analyzer is widely used by field installation and maintenance engineers for monitoring the spectral output from cell site transmitters. The Distance to Fault (DTF) option allows measurement of VSWR of the RF feed cables and, in the event of failing test limits, will then perform a DTF (TDR) measurement to identify the faulty part of the feed system.

Experience shows that one of the biggest causes of degradation or failure of RF communications systems is the transmission line from the base station transceiver to the antenna.

Testing the Transmission Line

When a new cell site is installed, the key measurement to test the quality of the installation is the VSWR (return loss) of the feed cable when terminated with the antenna system. Poor installation will result in unacceptable return loss (VSWR), reducing the quality of the system.

Even a system that is well within specification when installed may degrade with time due to the effects of weather, corrosion or accidental damage.

Fast Fault Location (DTF)

The 2399C spectrum analyzer DTF option is designed to enable users to measure VSWR (return loss) routinely and quickly. In the event of failure, switching to DTF mode pinpoints the problem area so that corrective action can be taken.



Distance to Fault

Identifying the faulty component in the system and initiating a repair is simplified, resulting in less system down time. The 2399C DTF measurement is real time so it can identify even intermittent faults.

Built-in Features

The DTF software option comes with a built-in Transmission Line Database that contains the characteristics of the most commonly used coaxial cables. This eliminates the need to refer to manufacturers' data sheets when configuring the 2399C for DTF operation.

When combined with low noise pre-amp and the quasi-peak detectors and filters, the EMC option enables the analysis of conducted and radiated emissions with the performance and features to support EMC pre-compliance testing. Correction factors for antenna and cable loss may be created and limit lines may be added with pass/fail indicators.

SPECIFICATION

FREQUENCY

Range

1 kHz to 3 GHz

Resolution

1 Hz

Frequency Span Width

100 Hz/div to 300 MHz/div in 1, 2, 5 step selections (auto-selected)
Zero span and Full span (1 kHz to 3 GHz)
Manual selection of Start, Stop and Span

Span Accuracy

±3% of indicated span width

Readout Accuracy

±(span accuracy + frequency standard accuracy + 50% of RBW)

Stability

Residual FM <100 Hz p-p at 1 kHz RBW, 1 kHz VBW, (p-p in 20 ms)

Noise Sidebands

-90 dBc/Hz at 10 kHz offset measured at 2.9 GHz
-98 dBc/Hz at 100 kHz offset measured at 2.9 GHz

FREQUENCY COUNTER

Resolution

1 Hz, 10 Hz, 100 Hz, 1 kHz

Accuracy

±(Reference frequency error + frequency readout accuracy + counter resolution ±1 count)

Sensitivity

<-70 dBm from 50 kHz to 3 GHz

AMPLITUDE

Measurement Range

+30 dBm to -110 dBm

Displayed Average Noise Level (DANL)

300 Hz RBW, 10 Hz VBW, 50 Ω termination

-105 dBm @ 50 kHz to 100 kHz
-110 dBm @ 100 kHz to 2.8 GHz
-105 dBm @ 2.8 GHz to 3 GHz

Pre-amp On (When fitted with internal pre-amplifier Option 7)

-115 dBm @ 50 kHz to 100 kHz
-130 dBm @ 100 kHz to 1.8 GHz
-129 dBm @ 1.8 GHz to 3 GHz

1 dB Compression Point

-10 dBm minimum 100 kHz to 3 GHz at 0 dB attenuation

Displayed Range

100 dB in 10 dB/div log scale
50 dB in 5 dB/div log scale
20 dB in 2 dB/div log scale
10 dB in 1 dB/div log scale
10 divisions with linear amplitude scale

Amplitude Units

Log scale mode dBm and dBmV
Linear scale mode V (μ V, mV, etc.) or dBV (dBmV only)
Quasi-Peak mode dB μ V, dBmV or dBm

Display Linearity

5 and 10 dB/div, ± 0.15 dB/dB, $\leq \pm 1.5$ dB over 10 divisions
1 and 2 dB/div, ± 0.5 dB over 10 divisions
Linear, ± 10 % of Reference Level over 10 divisions

Frequency Response

1 kHz to 5 MHz -3.0 dB to +1.0 dB
5 MHz to 2.9 GHz $\leq \pm 1.0$ dB

ATTENUATOR

Range

0 dB to 50 dB in 10 dB steps selected manually or automatically coupled to the Reference Level

Accuracy

± 0.5 dB/step up to a 1.5 dB max

REFERENCE LEVEL

Range

-110 dBm to +30 dBm with 1 kHz filter using 1 dB/div scale

Accuracy

± 1.5 dB (50 kHz to 3 GHz)

Resolution

0.1 dB steps

Residual Spurious

≤ -85 dBm (input terminated, 0 dB attenuation)

Harmonic Distortion

≤ -60 dBc (-40 dBm input at 0 dB attenuation)

Intermodulation

≤ -60 dBc (100 MHz to 2.9 GHz at -30 dBm input)

Other Spurious

≤ -60 dBc (10 MHz to 2.9 GHz at -30 dBm)

RESOLUTION BANDWIDTH

Selection

300 Hz, 1 kHz, 3 kHz, 10 kHz, 30 kHz, 100 kHz, 300 kHz, 1 MHz, 3 MHz
9 kHz and 120 kHz (Quasi-Peak Detector, Option 4)
100 Hz, 30 Hz, 10 Hz (Digital Resolution Bandwidth, Option 05)

Accuracy

$\pm 10\%$ (Digital Resolution Bandwidth, Option 5)
 $\pm 20\%$

Selectivity

60 dB/3 dB ratio <15:1
except 3 MHz filter 50 dB/3 dB ratio <15:1
60 dB/6 dB ratio <12:1 for 9 kHz and 120 kHz Quasi-Peak filters

Switching Error

± 1.0 dB

Video Bandwidth

1 Hz to 1 MHz in 1-3-10 sequence plus full BW

SWEEP

Rate (full screen)

20 ms to 1000 s in 1-2-5 sequence, 25 μ s to 100 s in Zero Span

Sweep Rate Accuracy

20% for <100 ms, 10% for all other sweep rates

Trigger Source

External, Line, Video, Free Run

Trigger Modes

Continuous, Single

Trigger Level

Internal Trigger: Adjustable over 10 divisions
External Trigger (Rear): TTL Level

Trigger Delay

± 1 sweep time

DISPLAY

Type

6.4 in. TFT Color LCD

Digital Resolution

640 H x 480 V active display area

MARKERS

Number

Up to 9 colored Markers available with 9 Delta Markers

Modes

Normal, Delta, Peak Search, Peak Track, 1/Delta, Marker Track, Marker to Center, Marker to Reference
All Markers to peak

Marker

Marker track
Marker to center
Marker to reference
Marker to peak

MEMORY

Trace storage

Up to 1,000 stored traces stored internally

Setup Storage

Up to 2,000 operational states stored internally

External

USB 2.0 interface for bulk storage (USB 1.1 compatible)

Display Traces

2 max.

INPUTS

RF Input

Type "N" 50 Ohm female connector

Input VSWR

<1.5:1 from 150 kHz to 3 GHz with 10 dB attenuation

Maximum Input

+30 dBm with 30 dB attenuation, 50 Vdc

LO Emissions

≤-70 dBm with 10 dB attenuation

OUTPUTS

IF Output

10.7 MHz nominal

Video Output

0 to 5 Vdc, VGA output

Printer Drivers

PC15 compatible via standard 25-pin female D-Sub Parallel Printer

Probe Power

+15 V, -12 V and Ground

FREQUENCY STANDARD (NORMAL STABILITY - SEE ALSO OPTION 03)

Frequency

10 MHz

Output Level

+5 dBm nominal

Temperature Stability

±2 ppm/°C 0°C to 40°C

Ageing Rate

±1 ppm/yr

Connector

BNC female

External Input

-5 dBm to +15 dBm

INTERFACES

GPIB

Conforms to IEEE 488.1 – 1987, 488.2 – 1992

Subsets

SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, C0, LE0, TE0

RS-232C

Full Duplex

Baud Rate

110 bps, 300 bps, 600 bps, 1200 bps, 2400 bps, 4800 bps, 9600 bps, 19.2 kbps, 38.4 kbps, 57.6 kbps, 115.2 kbps

Parity Check

Odd, Even or None

Data Length

7 or 8 bit selectable

Stop Bits

1 or 2 bit

Protocol

None, Xon-Xoff, RTS-CTS, DTR-DSR

ENVIRONMENTAL

Operating

0 to 40°C

Storage

-20 to +60°C

Temperature and Humidity

Meets MIL-T-28800E for Type 2, Class 5, non-condensing (85% operating, 90% storage)

Vibration/Shock

Meets MIL-T-28800E for Type 2, Class 5

Altitude

Operational up to 3,000 m (19,842 ft.), non-operational to 12,200 m (40,026 ft.)

PRODUCT SAFETY

Conforms to EN61010-1 for Class 1 portable equipment and is for use in a pollution degree 2 environment. The instrument is designed to operate from an Installation Category II.

ELECTROMAGNETIC COMPATIBILITY

Complies with the limits specified in the following standards: EN 55011: Class A and EN 50082-1

GENERAL CHARACTERISTICS

DIMENSIONS

350 mm (13.78 in.) W, 185 mm (7.28 in.) H, 381 mm (15 in.) D including handle

Weight

9.4 kg (20.7 lbs.)

Warm-up Time

15 minutes for specified accuracy

POWER REQUIREMENTS

Voltage

100 to 240 VAC ±10%

Frequency

50 to 60 Hz

Power Consumption

100 W max. (without options fitted)

HARDWARE OPTIONS

TRACKING GENERATOR (2399C/1)

Frequency Range

9 kHz to 3 GHz

Output Level

0 to -70 dBm

Output Level Resolution

0.1 dB step

Absolute Level Accuracy

$\leq \pm 1.0$ dB at 0 dB

Frequency Flatness

≤ 2.0 dB at -10 dBm

Signal Purity

Harmonics	≤ -15 dBc
Non-harmonics	≤ -25 dBc
Sub-harmonics	≤ -25 dBc

Leakage

≤ -90 dBm

HIGH STABILITY TIMEBASE (OPTION 03)

Temperature Stability

± 0.2 ppm/ $^{\circ}$ C 0 $^{\circ}$ C to 40 $^{\circ}$ C

Ageing Rate

± 0.1 ppm/yr

QUASI-PEAK DETECTOR (OPTION 04)

Quasi-Peak detector and EMC filters

RBW	9 kHz Band B	120 kHz Band C
Frequency Range	150 kHz to 30 MHz	30 MHz to 1 GHz
Charge Time (ms)	1 $\pm 20\%$	1 $\pm 20\%$
Discharge Time (ms)	160 $\pm 20\%$	550 $\pm 20\%$
Display Time (ms)	160 $\pm 20\%$	100 $\pm 20\%$

DIGITAL RESOLUTION BANDWIDTH FILTERS (OPTION 05)

Bandwidths

100 Hz, 30 Hz, 10 Hz

Bandwidth accuracy

$\pm 20\%$

Selectivity (-60 dB/-3 dB)

<5:1

Maximum span

1 MHz

Sweep times for 10 kHz span

RBW	100 Hz	<0.9 sec.
	30 Hz	<3 sec.
	10 Hz	<4.5 sec.

Displayed Average Noise Levels (DANL) between 1 MHz and 3 GHz reduces DANL by typically 5 dB from the values in the 300 Hz resolution bandwidth filter.

AC/DC POWER SUPPLY (OPTION 6)

DC Voltage

12 VDC to 21 VDC

External Battery

14.4 VDC @ 7 AH

Operation Time

1 Hour

INTERNAL LOW NOISE PRE-AMPLIFIER (OPTION 07)

Internally fitted option

DANL	Improves DANL by approximately 12 dB above 50 MHz	
Frequency Range	50 kHz to 50 MHz	-115 dBm typical
DANL	100 kHz to 1.8 GHz	-130 dBm typical
	1.8 GHz to 3 GHz	-129 dBm typical
Gain	Compensated internally	
Selection	User selected	

SOFTWARE OPTIONS

DISTANCE TO FAULT (DTF) (OPTION 11)

DISTANCE TO FAULT SPECIFICATIONS

DTF Measurement

Measurement Range

Up to 99 km (324,720 ft.) depending on cable loss

Units

Meters or Feet

Minimum Resolution

For two equal amplitude discontinuities using maximum span:

13.24 x Vr cm

Where Vr is the relative velocity factor for the cable.

Maximum Measurement Update Rate

20 ms for 500 points

Dynamic Range

>60 dB

Distance Accuracy

0.78 m for a single fault

Transmission Line Database

Data for common cables supplied as standard

VSWR or Return Loss Measurement

Calibration

Open circuit or Short circuit

Linearity

As spectrum analyzer: <0.15 dB/dB, <1.5 dB over 10 divisions

Accuracy

Linearity + directivity + test port mismatch

For Bridge 59999/170 at frequencies >50 MHz:

Accuracy <0.01 + 0.032 ρ^2 + linearity

Where ρ is reflection coefficient of system under test.

ACCESSORY OPTIONS TO MAKE THE MEASUREMENTS

The user can choose from a range of accessories to suit the test regime required.

In order for the DTF option to operate, the 2399C must be fitted with the optional tracking generator (2399C/1) and the DTF software, option 011.

Hardware Configurations

1. VSWR (Return Loss) only

Comprises:

RF Bridge (5 MHz to 3 GHz) 59999/170

RF cable, 0.5 m [type N (male) to type N (male)] 54351/022

Adapter type N (male) to type N (male) 54311/175

2. DTF only

Comprises:

Power Divider (type N) 54311/187

RF cable, 0.5 m [type N (male) to type N (male)] 54351/022

Calibration Load (50 Ohm) 54421/023

3. VSWR (return loss) and DTF

Comprises:

RF Bridge (5 MHz to 3 GHz) 59999/170

RF cable, 0.5 m [type N (male) to type N (male)] 54351/022

Adapter type N (male) to type N (male) 54311/175

Power Divider (type N) 54311/187

Calibration Load (50 Ohm) 54421/023

MARKER LABEL EDIT (OPTION 12)

This software option allows the user to change the marker label from the normal numeric format to a user defined 4-digit alpha-numeric label.

EMC ANALYZER SOFTWARE (OPTION 13)

This software option, which must be used in conjunction with Option 04 (Quasi-peak detectors and filters) and Option 7 (Internal pre-amplifier) which provides the user with some of the facilities required for EMC pre-compliance testing.

Features include:

Entry of correction factors for: Test Antenna
Cable loss
Transducer characteristics

Addition of limit lines

Choice of Log or Linear frequency scales

Semi-automated operation of quasi-peak functions

Upto 3 GHz

Radiated, conducted emissions

VERSIONS, OPTIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

Ordering

Numbers

2399C/0

2399C/1

Versions

1 kHz to 3 GHz basic spectrum analyzer

2399C/0 with tracking generator

Options

03

High stability timebase

04

Quasi-peak detectors and filters

05

Digital resolution bandwidth filters

06

AC/DC power supply

07

Internal pre-amplifier

11

Distance to fault (DTF) software

12

Marker label edit software

13

EMC analyzer software (requires options 4 and 7)

Supplied Accessories

Soft carry case

Front cover

CD ROM Containing: Operation manual and Programming manual

AC supply lead

RS-232 cable

2 x 250 V, 3.15 A fuses

Optional Accessories

Maintenance manual

AC2621

Rack mount kit

59999/170

Return loss bridge 5 MHz to 3 GHz, type N (f)

AC4250

50 Ω N to 75 Ω BNC

AC5008

DC block N type

AC8700

UHF antenna

80027

Soft carry case

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] (21) 5109 5128
Fax: [+86] (21) 5150 6112

CHINA Shenzhen

Tel: [+86] (755) 3301 9358
Fax: [+86] (755) 3301 9356

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 89 99641 0
Fax: [+49] 89 99641 160

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 [4] 115 4501
Fax: [+91] 80 [4] 115 4502

JAPAN

Tel: [+81] (3) 3500 5591
Fax: [+81] (3) 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SINGAPORE

Tel: [+65] 6873 0991
Fax: [+65] 6873 0992

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2011.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.

Part No. 46891/142, Issue 9, 09/11